


Battery Pack

Link5/10/15/20-L

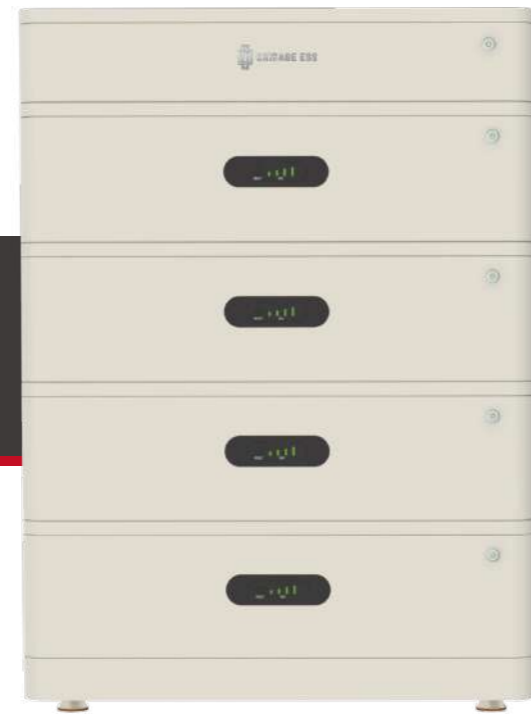

Product Features

- Flexible modular design, from 5kWh to 20kWh each battery stack
- IP65 protection degree, suitable for both indoor and outdoor installation
- Mounting handle design, easy lift and installation
- Quick connector and auto battery address setting, save installation time
- Independent BMS and SOC indicator for each module
- Safe LiFePO4 rechargeable battery

Technical Data

Model	Link5-L	Link10-L	Link15-L	Link20-L
Nominal Energy (Wh)	5,120	10,240	15,360	20,480
Usable Energy (Wh)	4,600	9,200	13,800	18,400
Nominal Capacity (Ah)	100	200	300	400
Nominal Voltage (V)	51.2			
Operation Voltage Range (V)	40-58.4			
Standard Charge Current (A)	50	100	150	200
Standard Discharge Current (A)	50	100	150	200
Max. Charge Current (A)	50	100	150	200
Max. Discharge Current (A)	50	100	150	200
Max. Parallel Quantities	4 pcs Link5-L modules			
Operation Temperature	Charge Temperature: 0°C-55°C Discharge Temperature: -20°C-55°C			
Working Humidity	20-95%RH (No condensing)			
Protection Degree	IP65			
Dimension (mm)	665Wx530Dx355H	665Wx530Dx535H	665Wx530Dx715H	665Wx530Dx895H
Net Weight (kg)	84	142	200	258
Installation	Floor mounted			
Certification	CE, UN38.3, IEC62619			
Communication	CAN, RS485			
Lifetime	6,000 Cycles@80% DOD			
Warranty	5 Years			